


# Hercules

Nelson Road Industrial Estate  
 Dartmouth, Devon, TQ6 9LA  
 Tel: +44 (0) 1803 833 736  
 Fax: +44 (0) 1803 834 846  
 Email: [info@hercules.org.uk](mailto:info@hercules.org.uk)

## KT90 - Technical Specifications

Model	KT90	KT90L
Drive Motor	VOAC F12-80	VOAC F12-110
System Pressure - typical	280 bar	210 bar
Motor Pressure - nominal	255 bar	185 bar
Flow – nominal	88 litres/min	121 litres/min
Pump / Motor Power	41/37 kW	42/37 kW
Typical Pump for full thrust	100cc@1000 rpm	130cc@950 rpm
Propeller Diameter	505 mm	505 mm
Propeller RPM	1100	1100
Nominal Thrust	620 Kg	620 Kg
Tunnel	Grade A steel, 16 mm thickness. Aluminium or GRP optional extra	
Wear Ring	Stainless steel wear ring in way of propeller tips, 5mm thick	
Drive Housing	SG Iron. Bronze or Aluminium optional extra	
Drive Shaft	Sealed bearing assembly, oil lubricated, 8 litre header tank supplied	
Propeller	Four blades, Manganese Bronze. Aluminium optional extra	

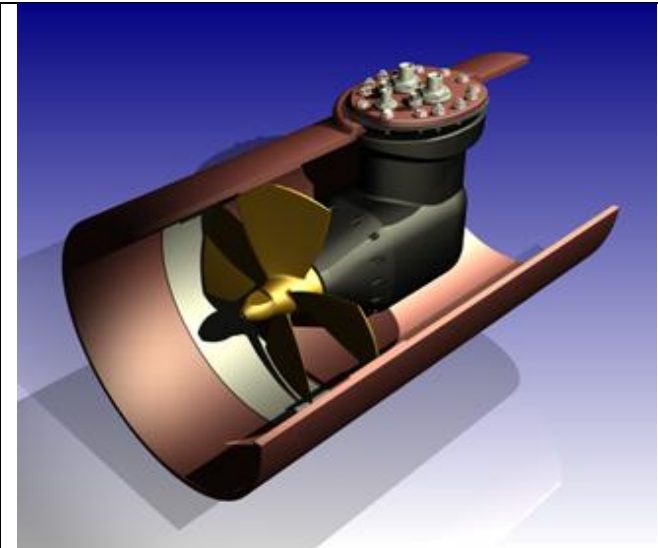

## Sales Enquiries

Please contact Kort Propulsion Company Limited, The Boat House, 20 High Street, Erith, Kent DA8 1QY  
 Telephone: 01322 346346 • Fax: 01322 347346 • Email: [info@kortpropulsion.com](mailto:info@kortpropulsion.com) • Web: [www.kortpropulsion.com](http://www.kortpropulsion.com)